



CYGNUS 1 INTRINSICALLY SAFE

ULTRASONIC THICKNESS GAUGE



The Cygnus 1 Intrinsically Safe is a simple and tough ultrasonic thickness gauge for safely measuring remaining metal thickness in hazardous/potentially explosive atmospheres. The gauge employs the Multiple-Echo technique to give accurate, self-verified measurements without removing protective coatings.

IDEAL FOR
USE IN



CHEMICAL
PLANTS



OIL AND
GAS



STORAGE
TANKS




LPG
VESSELS



ROAD
TANKERS

...oil and gas production infrastructure and pipelines, dry dust environments, mines, grain processing plants and fuel depots.

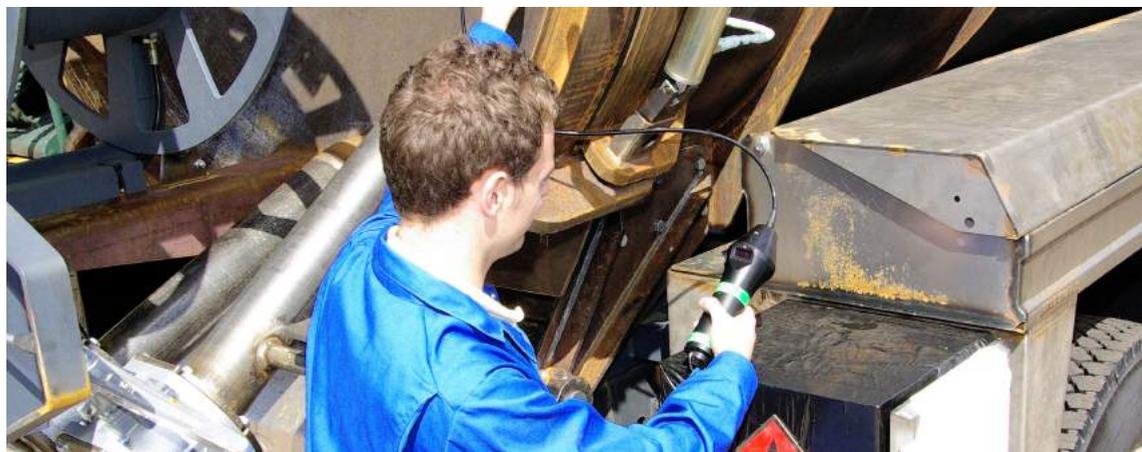

CYGNUS 1 INTRINSICALLY SAFE KEY FEATURES

- For use in Zone 0, Zone 1 hazardous areas
- No plant shutdown or hot work permit necessary
- Approved for use in mines
- Echo strength indicator to aid measurement
- Stable calibration, linear accuracy, no zero adjustment
- Self-verification of the measurements to ensure maximum accuracy
- Two rechargeable battery packs with charger
- Displays sound velocity settings
- Right angle probe for use in areas of restricted access
- Probe frequency selectable
- Metric / imperial switchable
- Low battery warning

CERTIFIED INTRINSICALLY SAFE TO:

ATEX

{Ex} II 1 G Ex ia IIC T6 Ga
(Tamb = -20°C to 40°C)

{Ex} M1 Ex ia I Ma

CSA Class 1 Group A, B,
C & D Division 1

IECEx

Ex ia IIC T6 Ga
Ex ia I Ma



**BRIGHT LED
DISPLAY WITH
POLARISED
FILTER**



**MULTIPLE
PROBE
OPTIONS
AVAILABLE**



**HEAVY-DUTY
SEALED
UNIT IP65
RATED**



**RUGGED,
DURABLE,
SHOCK-PROOF
CONSTRUCTION**

BENEFITS OF MULTIPLE-ECHO

- Measures remaining metal thickness on corroded and coated structures
- All measurements are error checked using 3 return echoes to give repeatable, reliable results
- Accepted by all major classification societies
- Greatly reduces inspection time and costs
- Echo strength indicator to aid measurement.



**GO TO
PRODUCT
PAGE**

CYGNUS 1 INTRINSICALLY SAFE SPECIFICATION

Feature	Description
Measuring Mode	Multiple-Echo using 3 echoes to ignore coatings
Materials	Velocities from 2000 - 7000 m/s (0.059 and 0.31 in/us) - covers virtually all common engineering materials
Accuracy	±0.1mm (±0.004") or 0.1% of thickness measurement, whichever is greatest, when calibrated in accordance with Cygnus Instruments calibration procedure
Resolution	0.1mm (0.004") or 0.05mm (0.002") (selectable)
Probe Options	Single crystal probes
Measurement Range in Steel	1 – 250mm (0.040 in. – 10 in.) depending on selected probe and configuration, material and temperature
Power	NiMH rechargeable battery pack
Battery Life	12 hours' continuous operation
Display	Bright LED display
Size	235 x 75mm (9.252" x 3.000") (H x W)
Weight	910g (32 oz) with remote probe (inc. batteries)
Operating Temp.	-10°C to +50°C (14°F to 122°F)
Certification	ATEX {Ex} II 1 G Ex ia IIC T6 Ga (Tamb = -20°C to 40°C) {Ex} I M 1 Ex ia I Ma (Tamb = 0°C to 45°C) IECEX Ex ia IIC T6 Ga Ex ia I Ma CSA Class 1 Group A, B, C, D Division 1
Environmental Protection	IP65
Standards	Designed for EN 15317
Warranty	3 years on gauge and 6 months on probe

ISS7 03/21



Cygnus Instruments Ltd.
Cygnus House
30 Prince of Wales Road
Dorchester
Dorset DT1 1PW
United Kingdom



Cygnus Headquarters

Call +44 (0) 1305 265 533
Email sales@cygnus-instruments.com
Visit cygnus-instruments.com

Cygnus UAE

Call +971 50 3459305
Email ribu@cygnus-instruments.com
Visit cygnus-instruments.com

Cygnus USA

Call +1 (410) 267 9771
Email sales@cygnusinstruments.com
Visit cygnus-instruments.com/us/

Cygnus Singapore

Call +65 6252 5909
Email sales@cygnus-instruments.sg
Visit cygnus-instruments.com/sg/